


# P7000i

**Combined Up and Down Frequency Converter, for interfacing L-Band Modems & iDirect Evolution Routers with legacy 70/ 140MHz based infrastructure**

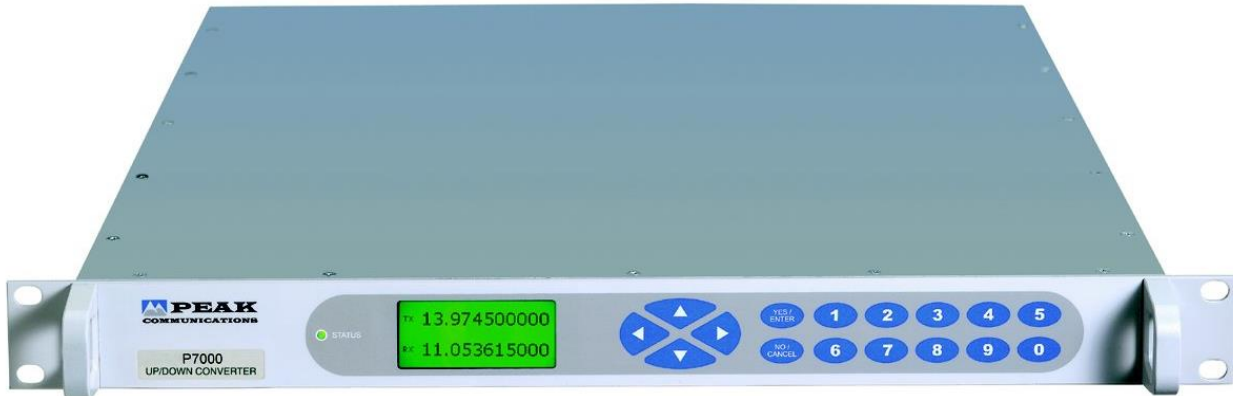

The **P7000i** is a next generation fully synthesised combined L-Band up and down converter which provides a low-cost solution for interfacing L-Band Modems and iDirect Evolution Routers to existing IF (70MHz/ 140MHz) based infrastructure, whilst maintaining professional signal quality and low BER.

The **P7000i series** of converters are designed to meet the phase noise, spurious, level and frequency stability requirements of Intelsat IBS/ Eutelsat SMS specifications and is compliant with IESS308/ 309. The product is suitable for high order modulation schemes and both very high & low data rates associated with digital TV signals.






The unit incorporates a graphics display module, membrane keyboard and features a clear and intuitive control and configuration menu fully utilising the unique graphics display.

For redundancy the **P7000i** uses a simple CANBUS® interface and has an integral redundancy controller for 1+1 & 2+1 operation (for use with external **TR1000L/ TR2000L** switch units), for N+1 systems a separate stand-alone control and switch unit is provided (**RCU1000 series**).


Note; separate stand-alone control and switching units can also be provided for 1+1 & 2+1 systems, please consult the factory.

**The unit has a highly stable internal reference source and will automatically detect and lock to an external 10MHz signal, when applied.**

## Peak Features

-  Compliant with IESS308/ 309 requirements
-  Suitable for use with latest high order modulation schemes in excess of 100Mbits/sec
-  Integral 1+1 & 2+1 CANBUS® redundancy control & N+1 switching system available
-  Easy & cost-effective interfacing of L-Band modems to existing 70/140MHz based infrastructure
-  L-Band monitoring points

## Rear panel view (sample)

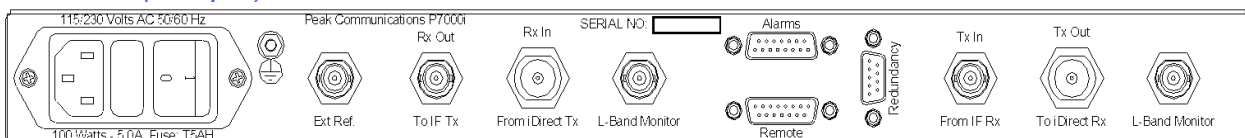

# P7000i – Typical Specification

## Up Converter (RX path)

### IF Input (from existing RX infrastructure)

Frequency	70 ±18 MHz
Option 1a;	140 ±36MHz
Connection	50Ω, BNC (f)
Option 3a;	75Ω, BNC (f)

### L-band Output (to L-Band Modem/ iDirect RX input)

Frequency	950-1525MHz
Option 5;	950-1700MHz
Option 5a;	950-1750MHz
Connection	50Ω, N-type (f)

### Transfer Characteristics

Conversion gain	+20dB ±1dB
Attenuation	0 to 30dB, stepped 0.1dB
1 dB GCP	Input -10dBm, output +10dBm
Gain stability	±0.5dB from 0 to 40°C ±0.1dB per week (constant temp.)
Gain flatness	±1dB full band (±1.5dB for wideband options) ±0.5dB across any 36MHz in band
Synth resolution	1Hz

### RF Performance

Phase noise	-75dBc/Hz at 10Hz -85dBc/Hz at 100Hz -85dBc/Hz at 1kHz -85dBc/Hz at 10kHz -97dBc/Hz at 100kHz -108dBc/Hz at 1MHz
Harmonics	Better than -50dBc
Spurious	<-60dBm (in band, non-carrier related) <-60dBc (in band, carrier related)
Group delay	Linear 0.025ns/MHz Ripple 1ns p-p Parabolic 0.015ns/MHz <sup>2</sup>
Noise figure	20dB nominal at maximum gain
Mute isolation	>80dB at minimum gain setting

## Down Converter (TX path)

### L-band Input (from L-Band Modem/ iDirect TX output)

Frequency	950 - 1750MHz
Option 7;	950 - 2150MHz
Connection	50Ω, N-type (f)

### IF Output (to existing TX infrastructure)

Frequency	70 ±18MHz
Option 1b;	140 ±36MHz
Connection	50Ω, BNC (f)
Option 3b;	75Ω, BNC (f)

### Transfer Characteristics

Conversion gain	+30dB ±1dB
Attenuation	0 to 30dB, stepped 0.1dB
1 dB GCP	Input -10dBm, output +15dBm
Gain stability	±0.5dB from 0 to 40°C ±0.1dB per week (constant temp.)
Gain flatness	±0.5dB full band (±1.5dB for wideband options) ±0.5dB across any 36MHz in band
Synth resolution	1Hz

### RF Performance

Phase noise	-65dBc/Hz at 10Hz -75dBc/Hz at 100Hz -83dBc/Hz at 1kHz -85dBc/Hz at 10kHz -100dBc/Hz at 100kHz -115dBc/Hz at 1MHz
Harmonics	Better than -50dBc (at input -50dBm, gain 30dB)
Spurious	<-60dBm (in band, non-carrier related) <-60dBc (in band, carrier related)
Group delay	Linear 0.025ns/MHz Ripple 1ns p-p Parabolic 0.015ns/MHz <sup>2</sup>
Noise figure	20dB nominal at maximum gain

## General

### L-Band Monitors (Up & Down Converter)

Connections	50Ω, BNC (f)
Level	-20dBc ±3dB
Option 11f;	IF monitor, replacing the standard L-Band monitor

### External Reference Input (with automatic detection & locking)

Frequency	Factory selectable 5 or 10MHz
Connector	50Ω, BNC (f)
Level	0dBm ±5dB
Required phase noise	to be better than 50dBc/Hz of output phase noise

### Internal Back-up Reference

Frequency	10MHz
Adjustment	±0.45ppm, software stepped 0.01ppm

### Standard Stability

Allan deviation	<5 x 10 <sup>-12</sup> over 1s
Ageing	<±3 x 10 <sup>-10</sup> /day, <±3 x 10 <sup>-9</sup> /month, <±3 x 10 <sup>-8</sup> /year
Temp stability	<±2 x 10 <sup>-9</sup> over operating range

### High stability (Option 8)

Allan deviation	<2 x 10 <sup>-12</sup> over 1s
Ageing	<±2 x 10 <sup>-10</sup> /day, <±2 x 10 <sup>-9</sup> /month, <±2 x 10 <sup>-8</sup> /year
Temp stability	<±1.5 x 10 <sup>-9</sup> over operating range

### Mechanical

Width	19", standard rack mount
Height	1U (1.75")
Depth	534mm (21"), plus connectors
Construction	Stainless steel chassis
Weight	Approx. 9.5kgs (21lbs)

### Environmental

Operating temp	-10°C to +50°C
EMC	ETSI EN 301 489-1: V2.2.1 & ETSI EN 300 673: V1.2.1
Safety	IEC/EN 62368-1:2014 (second edition)

### Power supply

Voltage	90-264VAC
Frequency	47-63Hz
Power	100 Watts max.

### Control System

Remote control	RS232/ 485 port
Option 9;	Ethernet; embedded web server & SNMP network management support.
Redundancy	CANBUS® interface for N+1 system
Alarms	In-built 1+1 & 2+1 controller LO lock failure PSU failure External alarm inputs Summary failure relay (form C)
Output mute	TTL input active low, front panel & remote control

## Options

- 1a) 140MHz IF input
- 1b) 140MHz IF output
- 2) Front panel with custom logo and colours
- 3a) 75Ω IF input
- 3b) 75Ω IF output
- 4) Lightweight Aluminium chassis
- 5) Wide band up converter output 950 to 1700MHz
- 5a) Wide band up converter output 950 to 1750MHz
- 7) Wide band down converter input 950 to 2150MHz
- 8) High stability internal reference option
- 9) Ethernet interface with embedded web server & SNMP
- 11f) IF monitor instead of standard L-Band monitor port

Notes; other 'P7000 series' options do not apply to these products. The addition of options can modify the typical specification, for details please consult the factory.

