


## P7001

### Fully synthesised, L-band to IF, Down Converter



The **P7001** is a next generation fully synthesised L-Band down converter which provides a low-cost solution for systems requiring an IF interface at 70MHz  $\pm$ 18MHz, 140MHz  $\pm$ 36MHz or switchable between 70 & 140MHz.

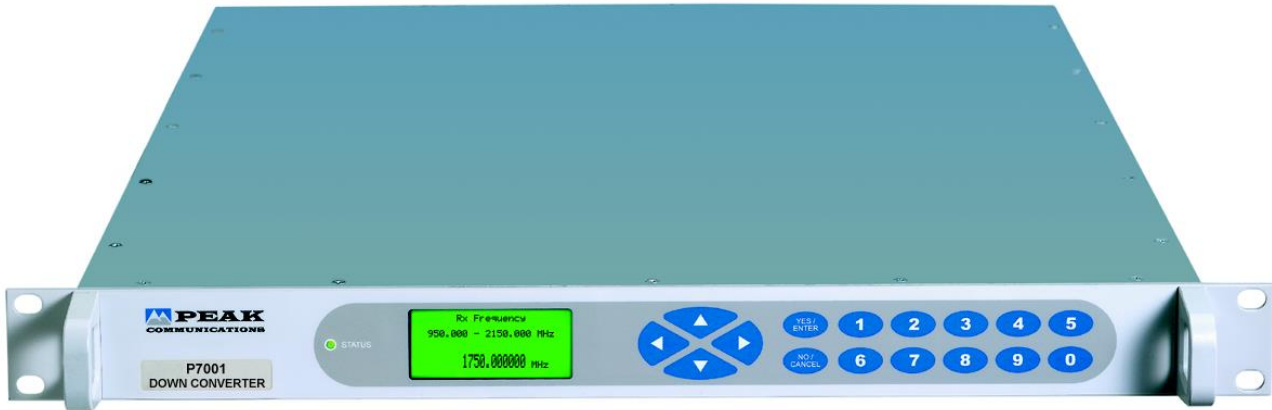







For redundancy the **P7001** uses a simple CANBUS® interface and has an integral redundancy controller for 1+1 & 2+1 operation (for use with external **R1000L**, **R2000L** switch units), for N+1 systems a separate stand-alone control and switch unit is provided (**RCU1000 series**).

Note; separate stand-alone control and switching units can also be provided for 1+1 & 2+1 systems, please consult the factory.

The **P7000 series** of converters are designed to meet the phase noise, spurious, level and frequency stability requirements of Intelsat IBS/ Eutelsat SMS specifications and is compliant with IESS308/ 309. The product is suitable for high order modulation schemes and both very high & low data rates associated with digital TV signals. The unit incorporates a graphics display module, membrane keyboard and features a clear and intuitive control and configuration menu fully utilising the unique graphics display.

**The unit has a highly stable internal reference source and will automatically detect and lock to an external 10MHz signal, when applied.**

#### Peak Features

-  Compliant with IESS308/ 309 requirements
-  Suitable for use with latest high order modulation schemes in excess of 100Mbits/sec
-  Integral 1+1 & 2+1 CANBUS® redundancy control & N+1 switch systems available
-  Aux DC and 10MHz reference outputs for Block Converters
-  Software selectable spectrum inversion
-  External alarm monitoring for Block Converters
-  Software trimming of internal 10MHz reference
-  L-band input monitoring point



## P7001 – Typical Specification

### L-band Input

Frequency	950-1750MHz
Option 7;	950-2150MHz
Connection	N-type (f), 50Ω

### IF Output

Frequency	70 ±18MHz
Option 1b;	140 ±36MHz
Option 1d;	switchable between 70 ±18MHz & 140MHz ±36MHz
Connection	BNC (f), 50Ω
Option 3b;	BNC (f), 75Ω
Spectrum sense	Invert user selectable (via front panel & remote)

### Transfer Characteristics

Conversion gain	+30dB ±1dB
Attenuation	0 to 30dB, stepped 0.1dB
1 dB GCP	Input -10dBm, output +15dBm
Gain stability	±0.5dB from 0 to 40°C ±0.1dB per week (constant temp.)
Gain flatness	±0.5dB full band (±1.5dB 950-2150MHz option) ±0.5dB across any 36MHz in band
Synth resolution	1Hz

### RF Performance

Phase noise	-65dBc/Hz at 10Hz -75dBc/Hz at 100Hz -83dBc/Hz at 1kHz -85dBc/Hz at 10kHz -100dBc/Hz at 100kHz -115dBc/Hz at 1MHz
Harmonics Spurious	Better than -50dBc (at input -50dBm, gain 30dB) <-60dBm (in band non-carrier related) <-60dBc (in band carrier related)
Group delay	Linear 0.025ns/MHz Ripple 1ns p-p Parabolic 0.015ns/MHz <sup>2</sup>
Noise figure	20dB nominal at maximum gain

### Block Down Converter/ LNB Drive

Output reference	10MHz at 0dBm nominal
DC supply	+22.5 volts regulated at 0.65 amps
Connection	Fed on L-band cable
Control	Switchable from front panel

### L-Band Monitor

Connection	BNC (f), 50Ω
Level	-20dBc ±3dB
Option 11f;	IF monitor, replacing the standard L-Band monitor

### External Reference Input (with automatic detection & locking)

Frequency	Factory selectable 5 or 10MHz
Connector	BNC (f), 50Ω
Level	0dBm ±5dB
Phase Noise	to be better than 50dBc/Hz of output phase noise

### Internal Back-up Reference

Frequency	10MHz
Adjustment	±0.45ppm, stepped 0.01ppm

### Standard Stability

Allan deviation	<5 x 10 <sup>-12</sup> over 1s
Ageing	<±3 x 10 <sup>-10</sup> /day, <±3 x 10 <sup>-9</sup> /month, <±3 x 10 <sup>-8</sup> /year
Temp stability	<±2 x 10 <sup>-9</sup> over operating range

### High Stability (Option 8)

Allan deviation	<2 x 10 <sup>-12</sup> over 1s
Ageing	<±2 x 10 <sup>-10</sup> /day, <±2 x 10 <sup>-9</sup> /month, <±2 x 10 <sup>-8</sup> /year
Temp stability	<±1.5 x 10 <sup>-9</sup> over operating range

### Mechanical

Width	19", standard rack mountable
Height	1U (1.75")
Depth	534mm (21"), plus connectors Option 4b; Short chassis 400mm (15.7"), plus connectors (offered with 0.5dB step attenuator & +10dBm output P1dBGCP)
Construction	Stainless Steel chassis
Weight	Approx. 9kgs (20lbs) Option 4; Lightweight Aluminium chassis 7.5kg (15.5lb)

### Environmental

Operating temp	-10°C to +50°C
EMC	ETSI EN 301 489-1: V2.2.1 & ETSI EN 300 673: V1.2.1 IEC/EN 62368-1:2014 (second edition)
Safety	

### Power supply

Voltage	90-264VAC
Frequency	47-63Hz
Power	35 Watts, plus external LNB power (if connected) Option 17; Redundant PSU; provides a 1+1 redundant PSU configuration with separate prime power inputs

### Control System


Remote control	RS232/ 485 port Option 9; Ethernet; embedded web server & SNMP network management support
Redundancy	CANBUS® interface for N+1 system In-built 1+1 & 2+1 controller
Alarms	LO lock failure PSU failure External alarm inputs Summary failure relay (form C)

### Options

- 1b) 140MHz IF output
- 1d) IF switchable between 70MHz and 140MHz output
- 2) Custom front panel logo and colour
- 3b) 75Ω IF output
- 4) Lightweight Aluminium chassis
- 4b) Short chassis (Aluminium)
- 6b) L-band fibre optic input (please refer to factory)
- 7) Wide band D/C input 950 to 2150MHz
- 8) High stability internal reference option
- 9) Ethernet interface with embedded web server & SNMP
- 11f) IF monitor instead of standard L-Band monitor port
- 17) Redundant power supplies

Notes; other 'P7000 series' options do not apply to these products. The addition of Options can modify the typical specification, for details please consult the factory.

### Rear panel view (sample)

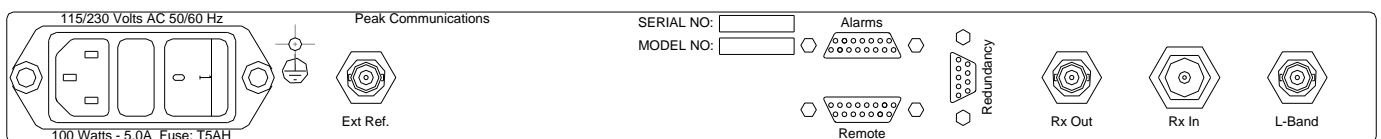

Peak Communications reserves the right to alter the specifications of this equipment without prior notice. P7001-190721.

Peak Communications Ltd., Unit 1, The Woodvale Centre, Woodvale Road, Brighouse, West Yorkshire, HD6 4AB, U.K.  
Tel; +44 (0)1484 714200 Sales; +44 (0)1484 714229 Fax; +44(0)1484 723666 Email; [sales@peakcom.co.uk](mailto:sales@peakcom.co.uk) web; [www.peakcom.co.uk](http://www.peakcom.co.uk)