

IBDH(A) series

Single-Range, Single & Multi-Channel, Rack Mount, Block Down Converters with full user interface & remote control



The 19-inch 1U rack mounted **IBDH(A) series** of block frequency down converter units from Peak Communications are designed to take the incoming SHF signal and produce an output at L-Band that is suitable for direct connection to an L-band demodulator or for further conversion typically by a **P7001** synthesised down converter.







The **IBDH(A) series** of units are mains powered and are constructed of high-grade components to give the ultimate performance. They utilise externally phase locked dielectric resonator oscillators (XPDRs) and are far superior in stability and phase noise to voltage-controlled oscillators (VCOs), as commonly used in other BDC designs. High rejection performance filtering techniques are employed to ensure unrivalled spurious response.

For redundancy the **IBDH(A)** uses a simple CANBUS® interface and has an integral redundancy controller for 1+1 & 2+1 operation (for use with external **R1000HH**, **R2000HH series** switch units), also compatible with the **RCUH100/ RCUH200 series** 1+1/ 2+1 'stand-alone' redundancy controllers. For N+1 systems the **RCU1002 series** is offered.

These converters use a single-stage topology apart from the **IBDH340**, which is dual-stage. The unit incorporates a graphics display module, membrane keyboard and features a clear and intuitive control and configuration menu fully utilising the unique graphics display.

The unit has a highly stable internal reference source and will automatically detect and lock to an external 10MHz signal, when applied.

Peak Features

-  High stability, low ripple and excellent phase noise, using PDRO technology
-  10MHz external reference fitted as standard with automatic internal reference back-up
-  Electronically variable attenuator option for both local & remote control of gain
-  Integral 1+1 & 2+1 CANBUS® redundancy control & N+1 switch systems available
-  L-Band monitor and fibre optic L-Band interface options available
-  Available in dual, triple & quad-channel versions



High grade, single & multi-channel block down converter products;

BDC Model	SHF Input Frequency (GHz)	L-Band Output Frequency (MHz)
Traditional receive band coverage;		
IBDH250	2.0-2.5 (S-Band)	950-1450
IBDH370	3.7-4.2 (C-Band)	950-1450
IBDH340, IBDH342(dual), IBDH344 (quad)	3.4-4.2 (full C-Band)	950-1750
IBDH420, IBDH422(dual), IBDH424 (quad)	3.4-4.2 (full C-Band)	1750-950 (inverted spectrum)
IBDH450, IBDH452(dual), IBDH454 (quad)	4.5-4.8 (INSAT C-Band)	950-1250
IBDH725	7.25-7.75 (X-Band)	950-1450
IBDH1070	10.7-11.7 (low Ku-Band)	950-1950
IBDH1095	10.95-11.70 (mid Ku-Band)	950-1700
IBDH1120	11.2-11.7 (mid Ku-Band)	950-1450
IBDH1145	11.45-12.20 (mid Ku-Band)	950-1700
IBDH1170	11.7-12.2 (mid Ku-Band)	950-1450
IBDH1171	11.70-12.75 (mid Ku-Band)	950-2000
IBDH1225	12.25-12.75 (mid Ku-Band)	950-1450
Transmit band coverage for ground test & ranging applications (consult factory with any specific filtering requirements);		
IBDH600	5.850-6.425 (C-Band)	950-1525
IBDH665	5.85-6.65 (extended C-Band)	950-1750
IBDH790	7.9-8.4 (X-Band)	950-1450
IBDH1275	12.75-13.75 (low Ku-Band)	950-1950
IBDH140	14.0-14.5 (Ku-Band)	950-1450
IBDH137	13.75-14.50 (extended Ku-Band)	950-1700
IBDH148	13.75-14.80 (super extended Ku-Band)	950-2000
IBDH184	17.30-18.40 (Full DBS-Band)	950-1850

For other 'non-standard' frequency requirements or multi-channel units (dual, triple & quad units), please contact the factory.


For multiple-range block down converters covering wider bandwidths please see IBDH(B) series datasheet.

For equivalent lower cost BDC units without the full user interface please see IBD(A) series datasheet.

For Ka-Band block down converters please see IBDH(Ka) series datasheet.

For equivalent remote mount units, please see PBD(A) series datasheet.

Rear panel view (sample)

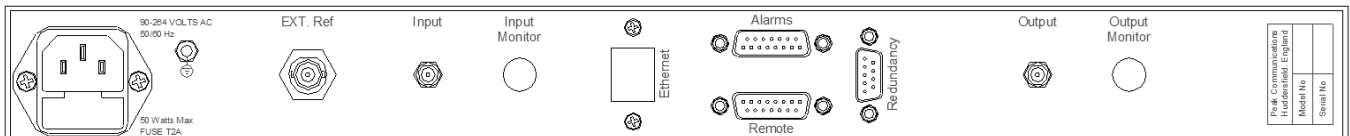

Peak Communications reserves the right to alter the specifications of this equipment without prior notice. IBDH(A)series-070322.

Peak Communications Ltd., Unit 1, The Woodvale Centre, Woodvale Road, Brighouse, West Yorkshire, HD6 4AB, U.K.

Tel; +44 (0)1484 714200 Sales; +44 (0)1484 714229 Fax; +44 (0)1484 723666 Email; sales@peakcom.co.uk Web; www.peakcom.co.uk

IBDH(A) series - Typical Specification

SHF Input

Connector SMA (f), 50Ω
Option 1a; N-Type (f), 50Ω

Note: for multi-channel version, multiple connectors are provided.

Return loss >18dB (>15dB for S-Band)

L-Band Output

Frequency 950 up to 2000MHz, depending on model
Spectrum sense Non-inverting, apart from IBDH420
Connector SMA (f), 50Ω
Option 1b; N-Type (f), 50Ω
Option 1c; BNC (f), 50Ω
Option 3; BNC (f), 75Ω

Note: for multi-channel version, multiple connectors are provided.

Return loss >15dB
1dB GCP +8dBm
Option 5b; +16dBm

Typical RF Performance

LO phase noise -55dBc/Hz at 10Hz
(typical with good phase noise -75dBc/Hz at 100Hz
-92dBc/Hz at 1kHz
ext. 10MHz ref) -100dBc/Hz at 10kHz
-105dBc/Hz at 100kHz
-125dBc/Hz at 1MHz

Harmonics Better than -50dBc
Spurious <-80dBm (in-band, non-carrier related),
Note: IBDH250 specified as <-70dBm.

Note: IBDH250 specified as <-75dBc (in-band, carrier related)

Note: C-Band units specified as <-65dBc at input -40dBm.

LO leakage <-80dBm (always out of band)

Note: IBDH250 specified as <-70dBm (in band).

3rd order intercept >+18dBm
Channel isolation -65dBc (for multi-channel versions only)

Transfer Characteristics

Conversion gain 30dB ±1dB at band centre
Option 4b; 40dB ±1dB at band centre
Gain stability ±0.5dB from 0 to 50°C
Gain flatness ±1dB full band (±1.5dB for bandwidths ≥800MHz)
±0.5dB across any 40MHz in-band
LO frequency dependant on model

LO, L-Band & SHF Monitor (Option 2)

Front or rear panel mounted
Connector 50Ω, SMA (f)
Note: other connector styles available, please consult the factory
Level -20dBc ±3dB (-10dBm nominal for LO monitor)

Electronically Variable L-Band Attenuator (Option 10)

Attenuation range 30dB nominal
Step size
Option 10a; 0.5dB
Option 10b; 0.1dB
Control Local & remote

Options

- 1a) N-Type (f) SHF interface connection
- 1b) N-Type (f) L-Band interface connection
- 1c) BNC (f) L-Band interface connection
- 2a) -20dBc L-band monitor on rear panel (SMA)
- 2b) -20dBc L-band monitor on front panel (SMA)
- 2c) -20dBc SHF monitor on rear panel (SMA)
- 2d) -20dBc SHF monitor on front panel (SMA)
- 2e) -10dBm nominal LO monitor on rear panel (SMA)
- 2f) -10dBm nominal LO monitor on front panel (SMA)
- 3) 75Ω interface at L-band (6dB gain loss)
- 4b) 10dB increase in gain to 40dB
- 5b) 1dB GCP increase to +16dBm (includes extra 10dB gain)
- 6) Fibre optic L-band interface connection
- 7) Redundant power supply
- 8) High stability internal reference option
- 9) Ethernet interface with embedded web server & SNMP
- 10a) Attenuator with local & remote control, 30dB stepped 0.5dB
- 10b) Attenuator with local & remote control, 30dB stepped 0.1dB
- 15) 5dB passive, fixed, slope compensation
- 15b) 2-8dB active, user settable, slope compensation

Notes: the addition of options can modify the typical specification, for details please consult the factory.

L-Band Linear Slope compensation (Option 15, 15b)

Compensates for internal circuitry & external primarily cross-site cables.

Note: unit options chosen will determine 'surplus' available for external compensation (for details contact factory).

Frequency 950-2150MHz
Passive (Option 15); 5dB nom., fixed positive compensation
Active (Option 15b); 0.01dB/MHz nom., settable positive compensation

Note: attenuator (option 10a/10b) nominal dynamic range is reduced according to the following table for narrower L-Band frequency ranges

Fmax. (MHz)	Attenuator range for option 10a/ 10b (dB)
2150	30
1950	28
1700	25.5
1450	23

External Reference Input (with automatic detection)

Frequency 10MHz (5MHz factory settable)
Connector BNC (f), 50Ω
Level 0dBm ±5dB
Required phase noise better than 50dBc/Hz of output Phase Noise
Locking delay <2 minutes to stabilise from cold

Internal Back-up Reference Stability

Allan deviation 5×10^{-11} over 1s
Ageing $<5 \times 10^{-9}$ per day, $<5 \times 10^{-7}$ per year
Temp stability $<5 \times 10^{-8}$ over 0 to 50°C

High stability (Option 8)

Allan deviation 3×10^{-12} over 1s
Ageing $<2 \times 10^{-10}$ per day, $<2 \times 10^{-8}$ per year
Temp stability $<3 \times 10^{-9}$ over 0 to 50°C

Mechanical

Width 19" standard rack mountable
Height 1U (1.75")
Depth ~400mm (15.7"), plus connectors

Note: for multi-channel versions, a longer ~534mm (21") chassis may be provided, depending upon options selected.

Construction Aluminium chassis
Weight 4-6kgs (9-13lbs) approx., unit and option dependent

Environmental

Operating temp 0°C to +50°C
EMC EN 55022, part B & EN 50082-1
Safety EN 60950

Power Supply

Voltage 90-264VAC
Frequency 47-63Hz
Power 50 Watts max.
Option 7; Redundant PSU; provides a 1+1 redundant PSU configuration with separate prime power inputs

Control System Interface

Remote control RS232/ 485 port
Option 9; Ethernet; embedded web server & SNMP network management support
Redundancy CANBUS® interface for N+1 system
In-built 1+1 & 2+1 controller
Discrete 'alarms interface' LO lock failure
PSU failure



Peak Communications reserves the right to alter the specifications of this equipment without prior notice. IBDH(A)series-070322.

Peak Communications Ltd., Unit 1, The Woodvale Centre, Woodvale Road, Brighouse, West Yorkshire, HD6 4AB, U.K.

Tel; +44 (0)1484 714200 Sales; +44 (0)1484 714229 Fax; +44 (0)1484 723666 Email; sales@peakcom.co.uk Web; www.peakcom.co.uk