


## P7002D

### Fully Synthesised, Dual-Channel, IF to L-Band, Up Converter

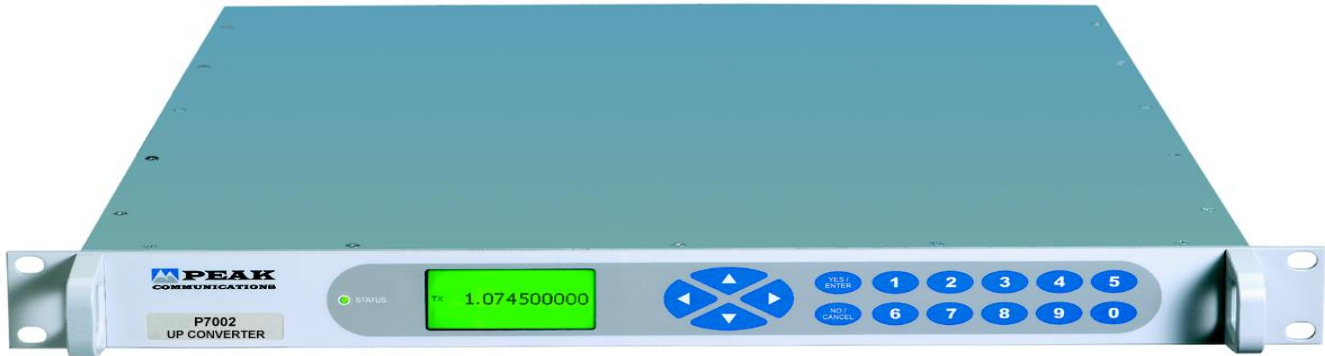

The **P7002D** is a next generation fully synthesised, dual-channel, L-Band up converter which provides a low-cost solution for systems requiring an IF interface at  $70\text{MHz}\pm 18\text{MHz}$  or  $140\text{MHz}\pm 36\text{MHz}$ .

For redundancy the **P7002D** uses a simple CANBUS® interface and has an integral redundancy controller for 1+1 & 2+1 operation. For channel to channel 1+1 switching see external **T1000L** switch unit, for complete chassis 1+1 or 2+1 switching see external **T1000LD**, **T2000LD** switch units, or for N+1 chassis switching systems a separate stand-alone control and switch unit is provided (**RCU1000D series**).







Note; separate stand-alone control and switching units can also be provided for 1+1 & 2+1 systems, please consult the factory.

The **P7000 series** of converters are designed to meet the phase noise, spurious, level and frequency stability requirements of Intelsat IBS/ Eutelsat SMS specifications and is compliant with IESS308/ 309. The product is suitable for high order modulation schemes and both very high & low data rates associated with digital TV signals. The unit incorporates a graphics display module, membrane keyboard and features a clear and intuitive control and configuration menu fully utilising the unique graphics display.

Each up converter can be configured individually for parameters such as frequency, gain etc., as shown in the specification.

**The unit has a highly stable internal reference source and will automatically detect and lock to an external 10MHz signal, when applied.**

#### Peak Features

-  Compliant with IESS308/ 309 requirements
-  Suitable for use with latest high order modulation schemes in excess of 100Mbits/sec
-  Integral 1+1 & 2+1 CANBUS® redundancy control & N+1 switch systems available
-  Aux DC and 10MHz reference outputs for block converters
-  External alarm monitoring for block converters
-  Software trimming of internal 10MHz reference

# P7002D – Typical Specification

## IF Input

Frequency	70±18MHz
Connection	Option 1a; 140±36MHz 50Ω, BNC
	Option 3a; 75Ω, BNC

## L-band Output

Frequency	950 -1525MHz
	Option 5; 950-1700MHz
	Option 5a; 950-1750MHz
Connection	50Ω, N-type (f)

## Transfer Characteristics

Conversion gain	+20dB ±1dB
Attenuation	0 to 30dB, stepped 0.1dB
1 dB GCP	Input -10dBm, output +10dBm
Gain stability	±0.5dB from 0 to 40°C ±0.1dB per week (constant temp.)
Gain flatness	±1dB full band (±1.5dB for wideband options) ±0.5dB across any 36MHz in band
Synth resolution	1Hz

## RF Performance

Phase noise	-68dBc/Hz at 10Hz -80dBc/Hz at 100Hz -84dBc/Hz at 1kHz -86dBc/Hz at 10kHz -99dBc/Hz at 100kHz -110dBc/Hz at 1MHz
Harmonics Spurious;	Better than -50dBc
In-band, non-carrier	<-65dBm (<-60dBm for wideband options)
In-band, carrier related	<-60dBc
Group delay	Linear; 0.025ns/MHz Ripple; 1ns p-p Parabolic; 0.015ns/MHz <sup>2</sup>
Noise figure	20 to 25dB typical at maximum gain
Mute isolation	>80dB at minimum gain setting

## Block Up Converter Drive

Output reference	10MHz at 0dBm nominal
DC supply	+22.5 volts regulated at 0.65 amps
Connection	Fed to BUC on L-band cable
Control	Switchable from front panel

## L-Band Monitor

Connection	50Ω, BNC (f), rear panel
Level	-20dBc ±3dB
	Option 11f; IF monitor, replacing the standard L-Band monitor

## External Reference Input (with automatic detection & locking)

Frequency	Factory selectable 5 or 10MHz
Connection	50Ω, BNC (f)
Level	0dBm ±5dB
Phase noise	to be better than 50dBc/Hz of output phase noise

## Internal Back-up Reference

Frequency	10MHz
Adjustment	±0.45ppm, software stepped 0.01ppm

## Standard Stability

Allan deviation	<5 x 10 <sup>-12</sup> over 1s
Ageing	<±3 x 10 <sup>-10</sup> /day, <±3 x 10 <sup>-9</sup> /month, <±3 x 10 <sup>-8</sup> /year
Temp stability	<±2 x 10 <sup>-9</sup> over operating range

## High stability (Option 8)

Allan deviation	<2 x 10 <sup>-12</sup> over 1s
Ageing	<±2 x 10 <sup>-10</sup> /day, <±2 x 10 <sup>-9</sup> /month, <±2 x 10 <sup>-8</sup> /year
Temp stability	<±1.5 x 10 <sup>-9</sup> over operating range

## Mechanical

Width	19", standard rack mount
Height	1U (1.75")
Depth	534mm (21"), plus connectors
Construction	Stainless steel chassis
Weight	Approx. 9.5kgs (21lbs)

## Environmental

Operating temp	-10°C to +50°C
EMC	ETSI EN 301 489-1: V2.2.1 & ETSI EN 300 673: V1.2.1
Safety	IEC/EN 62368-1:2014 (second edition)

## Power supply

Voltage	90-264VAC
Frequency	47-63Hz
Power	100 Watts

## Control System

Remote control	RS232/ 485 port
	Option 9; Ethernet; embedded web server & SNMP network management support
Redundancy	CANBUS® interface for N+1 system In-built 1+1 & 2+1 controller
Alarms	LO lock failure PSU failure External alarm inputs Summary failure relay (form C)
Output mute	TTL input active low, front panel & remote control

## Options

- 1a) 140MHz IF input
- 2) Custom front panel logo and colour
- 3a) 75Ω IF input
- 4) Lightweight Aluminium chassis
- 5) Wideband output 950-1700MHz
- 5a) Wide band output 950-1750MHz
- 8) High stability internal reference option
- 9) Ethernet interface with embedded web server & SNMP
- 11f) IF monitor instead of standard L-Band monitor port

Notes; other 'P7000 series' options do not apply to these products.  
The addition of options can modify the typical specification, for details please consult the factory.

## Rear panel view (sample)

