


# P7113

## Combined, Ku Band Up and L-Band Down Converter



The **P7113** is a next generation fully synthesised combined Ku-Band up and L-Band down converter which provides a low-cost solution for systems requiring an IF interface at  $70\text{MHz} \pm 18\text{MHz}$  or  $140\text{MHz} \pm 36\text{MHz}$ . The unit incorporates an L-Band interface as standard for the Ku-Band up converter allowing mixed 70/ 140MHz & L-Band infrastructure to be accommodated, whilst future-proofing for L-Band infrastructure upgrades.

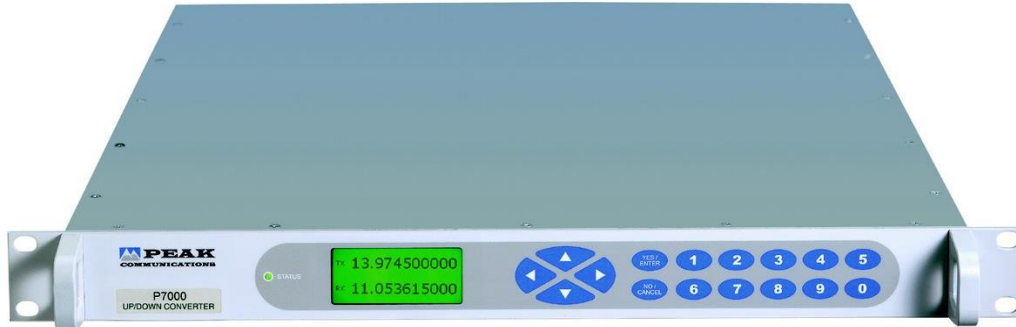








For redundancy the **P7113** uses a simple CANBUS® interface and has an integral redundancy controller for 1+1 & 2+1 operation (for use with external switch units), for N+1 system a separate stand-alone control and switch unit is provided (**RCU1000 series**).

Note; separate stand-alone control and switching units can also be provided for 1+1 & 2+1 systems, please consult the factory.


The **P7113** series of converters are designed to meet the phase noise, spurious, level and frequency stability requirements of Intelsat IBS/ Eutelsat SMS specifications and is compliant with IESS 308 / 309. The product is suitable for high order modulation schemes and both very high & low data rates associated with digital TV signals. The unit incorporates a graphics display module, membrane keyboard and features a clear and intuitive control and configuration menu fully utilising the unique graphics display.

**The unit has a highly stable internal reference source and will automatically detect and lock to an external 10MHz signal, when applied.**

### Peak Features

-  Compliant with IESS 308 / IESS 309 requirements
-  Used for 8PSK and 16QAM modulations in excess of 50Mbits/sec
-  L-Band interface
-  1+1 & 2+1 inbuilt redundancy control (see T1000/R1000 and T2000/R2000 redundancy unit data sheets)
-  CANBUS® for N+1 systems (see RCU1000 series redundancy unit data sheet)
-  Aux DC and 10MHz reference outputs for block down converters
-  Software selectable spectrum inversion on down converter
-  External alarm monitoring for block down converters
-  Software trimming of internal primary frequency reference

### Rear panel view (sample)

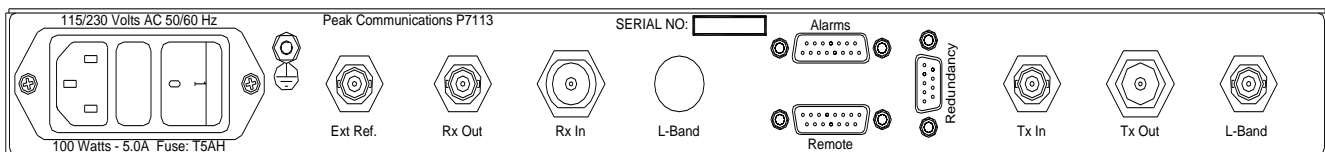

## **P7113 – Typical Specification** **Up Converter**

### **IF Input**

Frequency	70 ±18MHz
Option 1a;	140 ±36MHz
Connection	50Ω, BNC (f)
Option 3a;	75Ω, BNC (f)

### **Ku-band Output**

Frequency	13.75-14.5GHz
Connection	50Ω N-type (f)
VSWR	better than 1.3:1

### **Transfer Characteristics**

Conversion gain	+30dB ±1dB
Attenuation	0 to 30dB, stepped 0.1dB
1 dB GCP	Input -10dBm, output +8dBm
Gain stability	±0.5dB from 0 to 40°C
	±0.1dB per week (constant temp.)
Gain flatness	±1dB full band
	±0.5dB across any 36MHz in band
Synth resolution	1Hz

### **RF Performance**

Phase noise	-71dBc/Hz at 100Hz
	-76dBc/Hz at 1kHz
	-82dBc/Hz at 10kHz
	-90dBc/Hz at 100kHz
	-110dBc/Hz at 1MHz
Harmonics	Better than -50dBc
Spurious	<-55dBm (in band, non-carrier related)
	<-55dBc (in band, carrier related)
Group delay	Linear 0.025ns/MHz
	Ripple 1ns p-p
	Parabolic 0.015ns/MHz <sup>2</sup>
Noise figure	20dB nominal at maximum gain

## **Down Converter**

### **L-band Input**

Frequency	950-1750MHz
Option 7;	950-2150MHz
Connection	50Ω, N-type (f)

### **IF Output**

Frequency	70 ±18MHz
Option 1b;	140 ±36MHz
Connection	50Ω BNC (f)
Option 3b;	75Ω, BNC (f)
Spectrum sense	Invert switchable (from front panel)

### **Transfer Characteristics**

Conversion gain	+30dB ±1dB
Attenuation	0 to 30dB, stepped 0.1dB
1 dB GCP	Input -10dBm, output +15dBm
Gain stability	±0.5dB from 0 to 40°C
	±0.1dB per week (constant temp.)
Gain flatness	±1.0dB full band (±1.5dB for wideband options)
	0.5dB across any 36MHz in band
Synth resolution	1Hz

### **RF Performance**

Phase noise	-65dBc/Hz at 10Hz
	-75dBc/Hz at 100Hz
	-80dBc/Hz at 1kHz
	-85dBc/Hz at 10kHz
	-96dBc/Hz at 100kHz
	-110dBc/Hz at 1MHz
Harmonics	Better than -50dBc
Spurious	<-60dBm (in band, non-carrier related)
	<-60dBc (in band, carrier related)
Group delay	Linear 0.025ns/MHz
	Ripple 1ns p-p
	Parabolic 0.015ns/MHz <sup>2</sup>
Noise figure	20dB nominal at maximum gain
Mute isolation	>60dB at minimum gain setting

## **General**

### **Block Down Converter Drives**

Output reference	10MHz at 0dBm nom
DC supply	+22.5 volts regulated at 0.5 amps
Connection	Fed to BDC on L-band cables
Control	Switchable from front panel

### **External Reference Input (with automatic detection & locking)**

Frequency	Factory selectable 5 or 10MHz
Connector	50Ω, BNC (f)
Level	0dBm ±5dB
Required phase noise	to be better than 50dBc/Hz of output phase noise

### **Internal Back-up Reference**

Frequency	10MHz
Adjustment	±0.45ppm, software stepped 0.01ppm

### **Standard Stability**

Allan deviation	<5 x 10 <sup>-12</sup> over 1s
Ageing	<±3 x 10 <sup>-10</sup> /day, <±3 x 10 <sup>-9</sup> /month, <±3 x 10 <sup>-8</sup> /year
Temp stability	<±2 x 10 <sup>-9</sup> over operating range

### **High stability (Option 8)**

Allan deviation	<2 x 10 <sup>-12</sup> over 1s
Ageing	<±2 x 10 <sup>-10</sup> /day, <±2 x 10 <sup>-9</sup> /month, <±2 x 10 <sup>-8</sup> /year
Temp stability	<±1.5 x 10 <sup>-9</sup> over operating range

### **Mechanical**

Width	19", standard rack mount
Height	1U (1.75")
Depth	534mm (21"), plus connectors
Construction	Stainless steel chassis
Weight	Approx. 9.5kgs (21lbs)

### **Environmental**

Operating temp	-10°C to +50°C
EMC	ETSI EN 301 489-1: V2.2.1 & ETSI EN 300 673: V1.2.1
Safety	IEC/EN 62368-1:2014 (second edition)

### **Power supply**

Voltage	90-264VAC
Frequency	47-63Hz
Power	100 Watts

### **Control System**

Remote control	RS232/ 485 port
Option 9;	Ethernet; embedded web server & SNMP network management support
Redundancy	CANBUS® interface for N+1 system
	In-built 1+1 & 2+1 controller
Alarms	LO lock failure
	PSU failure
	External alarm inputs
	Summary failure relay (form C)

## **Options**

- 1a) 140MHz IF input
- 1b) 140MHz IF output
- 2) Front panel with custom logo and colours
- 3a) 75Ω IF input
- 3b) 75Ω IF output
- 4) Lightweight Aluminium chassis
- 7) Wide band D/C input 950 to 2150MHz
- 8) High stability internal reference option
- 9) Ethernet interface

Notes; other 'P7000 series' options do not apply to these products.

The addition of options can modify the typical specification, for details please consult the factory



Peak Communications reserves the right to alter the specifications of this equipment without prior notice. P7113-180821.

Peak Communications Ltd., Unit 1, The Woodvale Centre, Woodvale Road, Brighouse, West Yorkshire, HD6 4AB, U.K.

Tel; +44 (0)1484 714200 Sales; +44 (0)1484 714229 Fax; +44(0)1484 723666 Email; sales@peakcom.co.uk web; www.peakcom.co.uk