

PBU(Ka) Series

Ka-Band, Single-Range, Remote Mounted Block UpConverters

Products;

PBU1970	L-Band to Ka-Band (19.70-20.20GHz)
PBU2750	L-Band to Ka-Band (27.50-28.50GHz)
PBU2830	L-Band to Ka-Band (28.30-29.10GHz)
PBU2850	L-Band to Ka-Band (28.50-29.50GHz)
PBU2900	L-Band to Ka-Band (29.00-30.00GHz)
PBU2960	L-Band to Ka-Band (29.60-30.20GHz)
PBU3100	L-Band to Ka-Band (30.00-31.00GHz)

For other non-standard frequency requirements & multi-band solutions, please contact the factory.
For equivalent rack mount units, please see IBUH(Ka) series datasheets.



The **PBU(Ka) series** remote mounted, block up converter units from Peak Communications are designed to be fully compatible with a wide range of L-Band modulators and frequency converters. This high-grade range of **PBU** outdoor units will accept the L-band output of a **P7000 series** up converter or modem and provide the frequency conversion to Ka bands.








The **PBU(Ka) series** utilise externally phase locked dielectric resonator oscillators (XPDRos) and are far superior in stability and phase noise to voltage-controlled oscillators (VCOs), as commonly used in other BUC designs.

For redundancy, the **PBU(Ka)** uses a simple CANBUS® interface and has an integral redundancy controller for 1+1 & 2+1 operation (for use with remote mounted **T1000HR(Ka)**, **T2000HR(Ka)** switch units, that automatically configure the 'standby' unit during the switch-over process). Alternatively, traditional **RCUH50(Ka) /52(Ka)** rack mounted redundancy controllers are available (please contact the factory).

For supply, the units accept a wide range of DC voltages. They can be offered with the remote mounted **OPS series** AC to DC PSU's, alternatively the **D600** rack mounted DC & reference driver units are available.

The unit has a highly stable internal 10MHz reference signal and will automatically detect and lock to an external 10MHz signal, when applied.

Peak Features

-  External reference locking with automatic high stability internal reference back-up
-  Temperature compensated for thermal stability and fast warm-up
-  High stability, low ripple and excellent phase noise, using PDRO technology
-  Optional electronically variable 0 to 30dB attenuator, with Ethernet based remote control
-  Rugged weatherproof housing
-  Integral 1+1 & 2+1 CANBUS® redundancy control & external switch units available
-  Indoor rack mount & outdoor weatherproof AC to DC PSU's available



PBU(Ka) Series – Typical Specification

SHF Output

Frequency

PBU1970	19.7-20.2GHz
PBU2750	27.5-28.5GHz
PBU2830	28.3-29.1GHz
PBU2850	28.5-29.5GHz
PBU2900	29.0-30.0GHz
PBU2960	29.6-30.2GHz
PBU3100	30.0-31.0GHz

Connection	K-Type (f), 50Ω or 2.92mm (f)
Return loss	15dB
1dB GCP	+8dBm

L-Band Input

Frequency	950 up to 1950MHz, dependent upon model
Connector	N-type (f), 50Ω
Return loss	>15dB

RF Performance

LO Phase noise (typical with good phase noise ext. 10MHz ref)	-45dBc/Hz at 10Hz -65dBc/Hz at 100Hz -95dBc/Hz at 1kHz -100dBc/Hz at 10kHz -100dBc/Hz at 100kHz -115dBc/Hz at 1MHz
Spurious	<-70dBm (in band non-carrier related) <-65dBc (in band carrier related)

Note; 2nd harmonic of IF (2xIF) at -50dBc@0dBm output, if in-band

3rd order intercept	>+18dBm
LO leakage	<-70dBm (always out of band)

Transfer Characteristics

Conversion gain	17dB ±1dB at band centre
Gain stability	±0.75dB from 0 to 50°C
Gain flatness	±1dB full band (±1.5dB for bandwidths ≥800MHz) ±0.5dB across any 40MHz in-band dependant on model
LO frequency	dependant on model

Variable L-Band Attenuation (Option 3)

Attenuation range	30dB nominal
Step size	0.1dB or 0.5dB
Control	Remote via Ethernet (with option 9)

External Reference Input

Frequency	10MHz
Connection	Separate TNC (f), 50Ω connection Option 1c; Fed in on L-band cable
Level	0dBm ±5dB
Required phase noise	to be better than 50dBc/Hz of output phase noise
Locking delay	<5 minutes to stabilise from cold

Internal back-up reference;

Allan deviation	5×10^{-11} over 1s
Ageing	$<5 \times 10^{-9}$ per day, $<5 \times 10^{-7}$ per year
Temp stability	$<5 \times 10^{-8}$ over 0 to 60°C

Additional Filtering (Option 14)

Additional filtering for mounting locations within close proximity to UHF transmitters (up to 5W), as often encountered on mobile vehicle installations.

Mechanical

Dimensions	290 x 230 x 95mm (11.4 x 9.1 x 3.7 inch)
Construction	Die-cast Aluminium, weatherproof, IP66 rated
Weight	Approx. 4kgs (9lbs)

Environmental

Operating temp	-25°C to +55°C (less solar gain)
Option 12b;	-40°C to +55°C (less solar gain), with extended warm-up time for cold start (including degraded gain stability) & higher current
Humidity	0-100% condensing
EMC	EN 55022-part B & EN 50082-1
Safety	EN 60950

Power Supply

Voltage	+27 to +36VDC
Current	1.5A max (option dependent)
Connection	Fed via control system interface connection Option 2c; Fed in on L-band cable Option 2d; Fed in on the L-Band cable as well as the control system interface connection

Control Interface


Alarms	Summary failure relay (form C) Option 5; Removal of 'Ext Ref lock' alarm Note; external reference 'lock' alarm is included in the summary alarm as standard, this can be removed if an external reference is not being provided Option 7; Bi- coloured LED for '10MHz lock' and 'DC power' status indication
Connection	multi-pin circular weatherproof (mating part supplied)
Remote control	RS232/ 485 port Ethernet; embedded web server & SNMP network management support.
Redundancy	CANBUS® interface & in-built 1+1 & 2+1 controller

Options

- 1c) 10MHz reference input via L-Band interface, replacing the separate TNC connection feed system
- 2c) DC input via L-Band interface, replacing the control interface feed system
- 2d) DC input via the L-Band interface, as well as the standard DC feed system via the control interface
- 3a) 30dB L-Band electronic variable attenuator, 0.5dB step
- 3b) 30dB L-Band electronic variable attenuator, 0.1dB step
- 5) Removal of ext. ref. 'lock' alarm from summary alarm
- 7) Bi-coloured ext. ref. 'lock' and 'DC power' status indication
- 12b) Low temperature operation to -40°C
- 14) Filtering for close proximity UHF transmitters
- 16) Factory pre-set IP address

Note; the addition of options can modify the typical specification, for details please consult the factory

Connector panel view (sample)

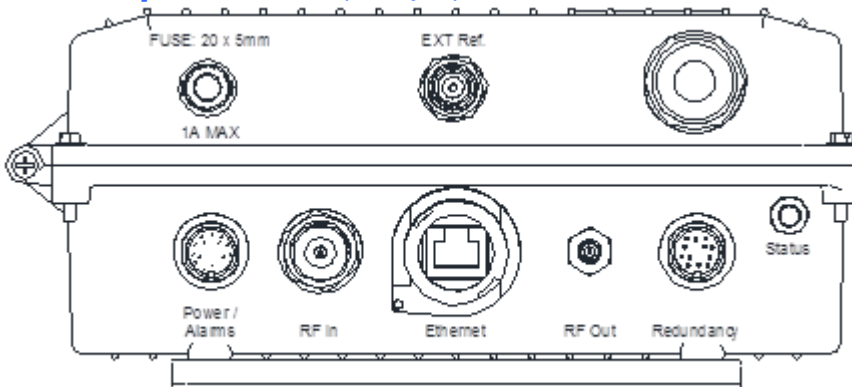

Peak Communications reserves the right to alter the specifications of this equipment without prior notice. PBU(Ka)series-070322.

Peak Communications Ltd., Unit 1, The Woodvale Centre, Woodvale Road, Brighouse, West Yorkshire, HD6 4AB, U.K.

Tel; +44 (0)1484 714200 Sales; +44 (0)1484 714229 Fax; +44 (0)1484 723666 Email; sales@peakcom.co.uk Web; www.peakcom.co.uk